






Our floors are designed to withstand stain and scratches while also being fire retardant, easy to clean and 100% waterproof. Additionally they are environment friendly as they can be easily recycled.



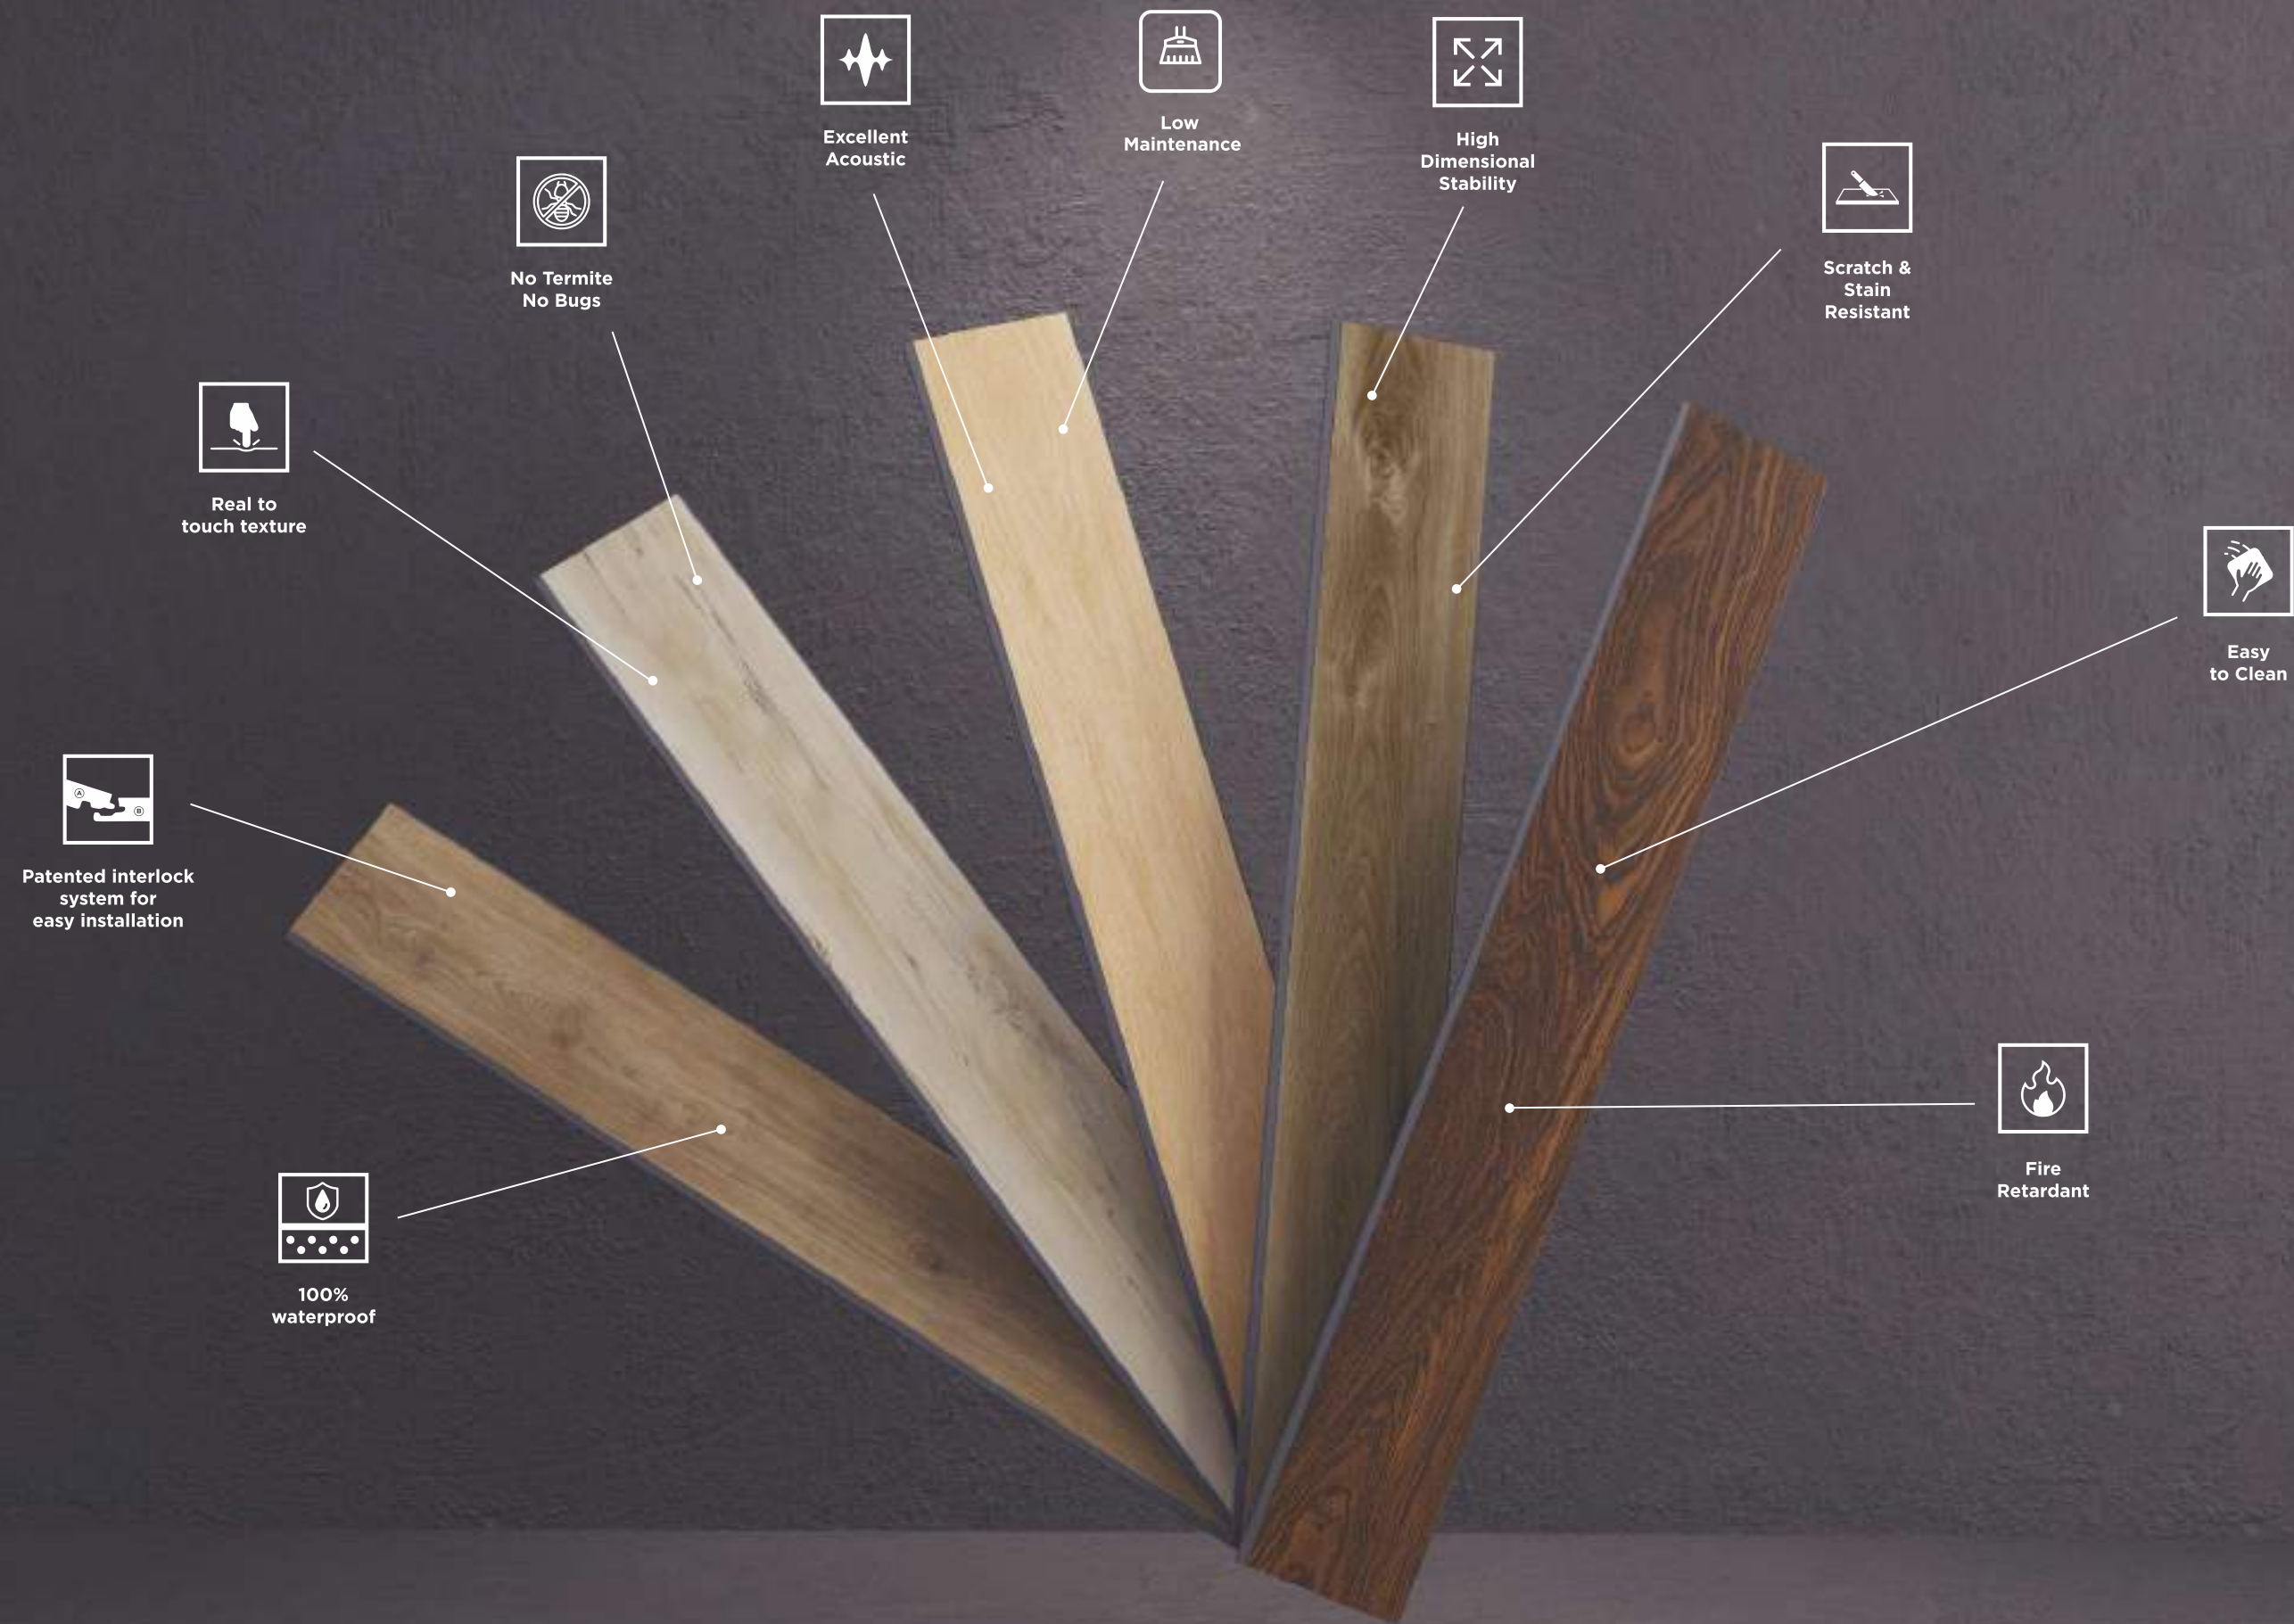

Experience unmatched comfort and quietness as our SPC Flooring is designed to reduce noise, reating a peaceful ambiance in your home. Along with that, It has many qualities like being water proof, low maintenance, kid-friendly, family friendly, and quick to install.

So, Don't compromise on quality – choose our SPC Flooring for the best quality at the best price at Our.




VARIETIES

of colors

Rigid core flooring from Our, blends the beauty of wood with the sturdiness of stone. We provide an array of SPC Flooring alternatives to make your space distinctive. Despite being adaptable and durable, our flooring follows a methodology that takes into account specific placement and space constraints. Inspired by the true nature of Earthy hues and textures, each of these is inventively manufactured and has a unique characteristic which makes it perfect for a variety of applications.

PRODUCT

Structure

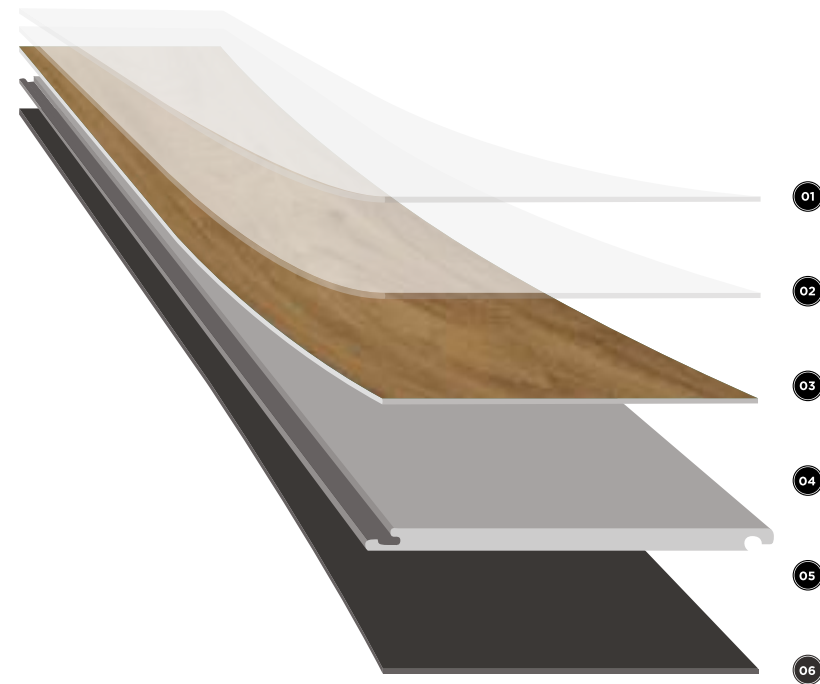

01 UV Coating

It is the topmost layer of our SPC floors. A UV-cured coating is applied to the surface of the flooring and hardened using UV light. This layer provides added protection against fading, or discoloration caused by exposure to sunlight. This layer also renders a stain-free quality and is responsible for the matt finish.

02 Wear Layer

on SPC floors is a clear, protective layer that is applied on top of the design layer. it is made of a durable material that helps to resist scratches and wear from foot traffic. This layer is important because it helps to prolong the life of the flooring and keep it looking new for longer

03 PVC Decorative Layer

The decor film layer on SPC (Stone Polymer Composite) floors is a thin, printed layer that is applied on top of the core layer. The decor film layer is important because it gives the flooring its aesthetic appeal, allowing it to mimic the look of natural wood or other materials while providing the durability and resistance of spc.

04 SPC Board


The core layer of the floors is the main structural layer made from a mixture of polymer Resin and Natural stone compotion ,which gives it strength and stability and also contributes to its waterproof property. The SPC core layer is also dense and stable, it makes the SPC flooring much more durable and resistant to wear and tear compared to traditional vinyl flooring.

05 UNICLIC Locking Technology

This Unique Feature Makes the SPC floors so easy to install and DIY-friendly. At KEO Surface our floors have a patented locking mechanism (Unilin) which allows a floating installation and keeps the floors attached more effectively. This layer also ensures that no adhesives or materials are required for installation.


06 Underlayment

This layer contributes to additional cushioning stability and sound insulation for the flooring. It is typically made of high-density IXPE or EVA attached beneath the Core.

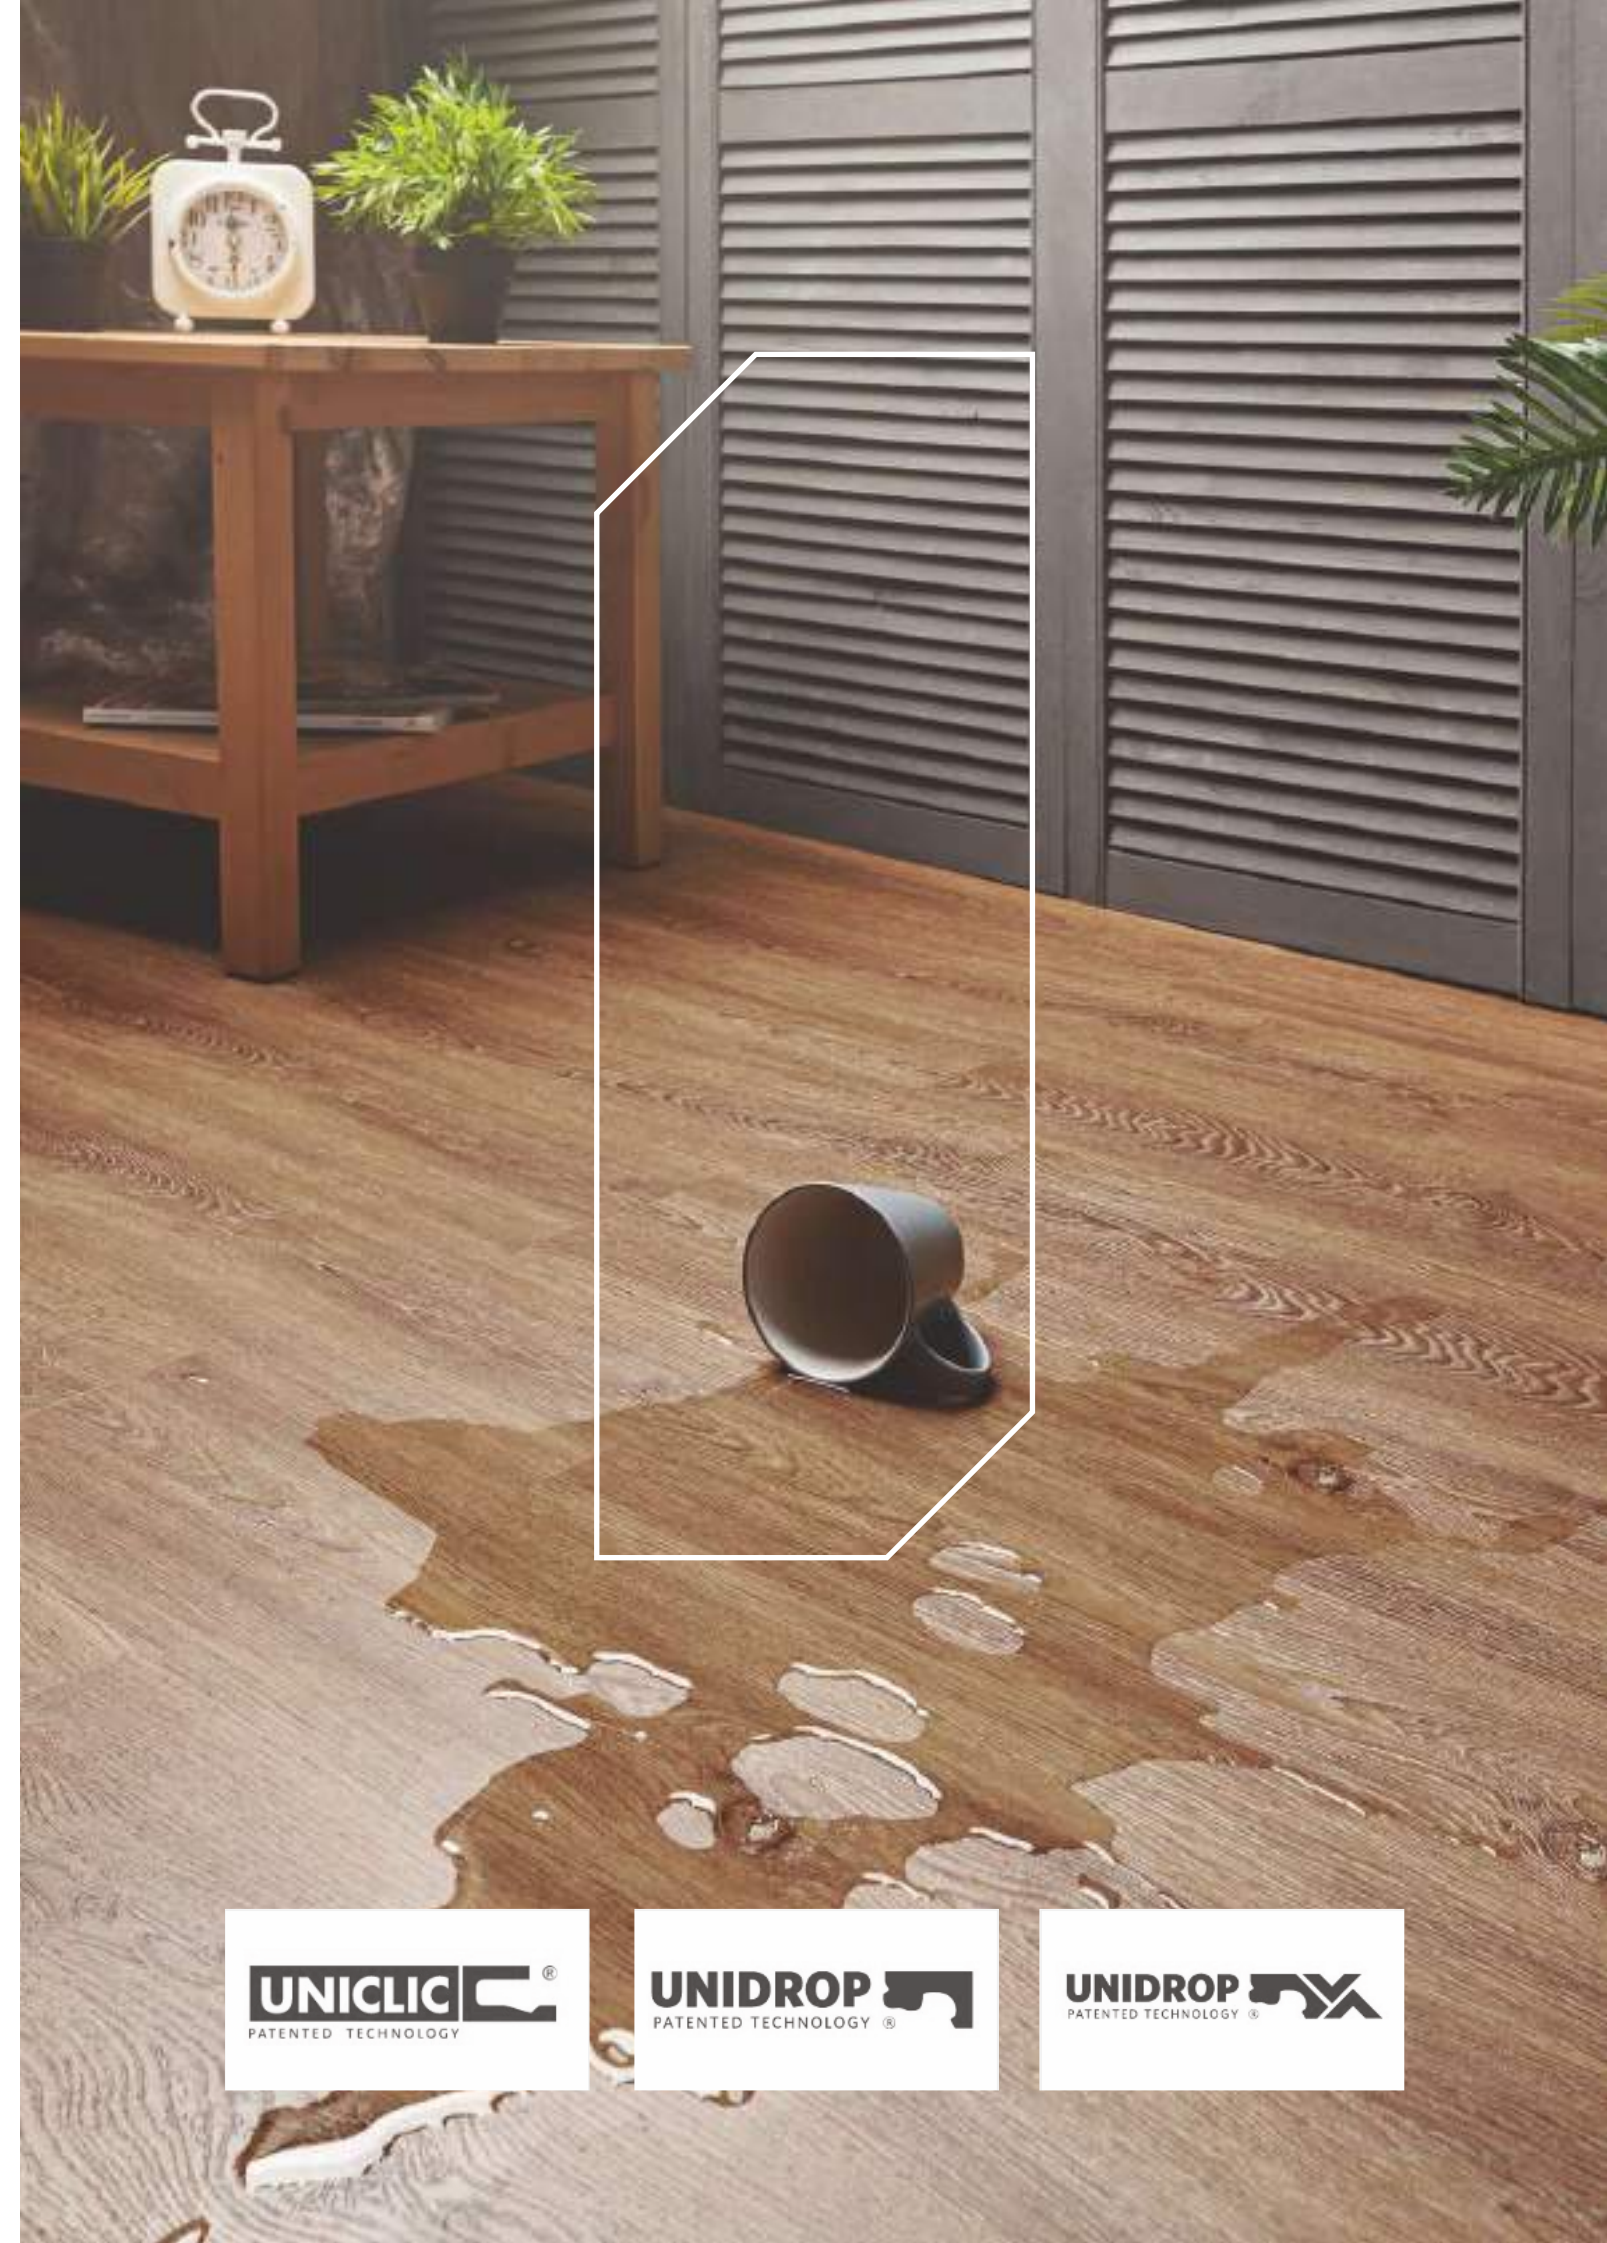



PRODUCT
SIZES

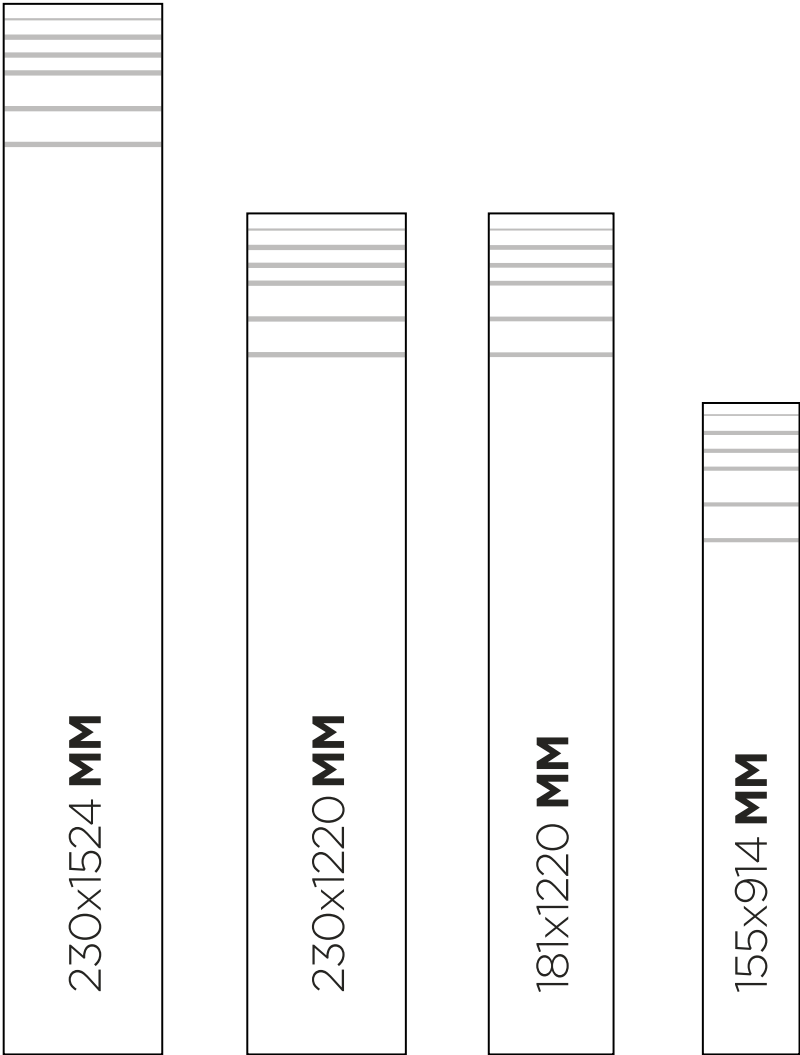

5 TO 7.5^{mm}
THICKNESS




LUXE
COLLECTION

It's a perfect mimic of the look and feel of natural materials yet more appealing and easy to maintain compared to others natural flooring along with the same classy and elegant vibes.

AVAILABLE
COLORS

LUXE
COLLECTION

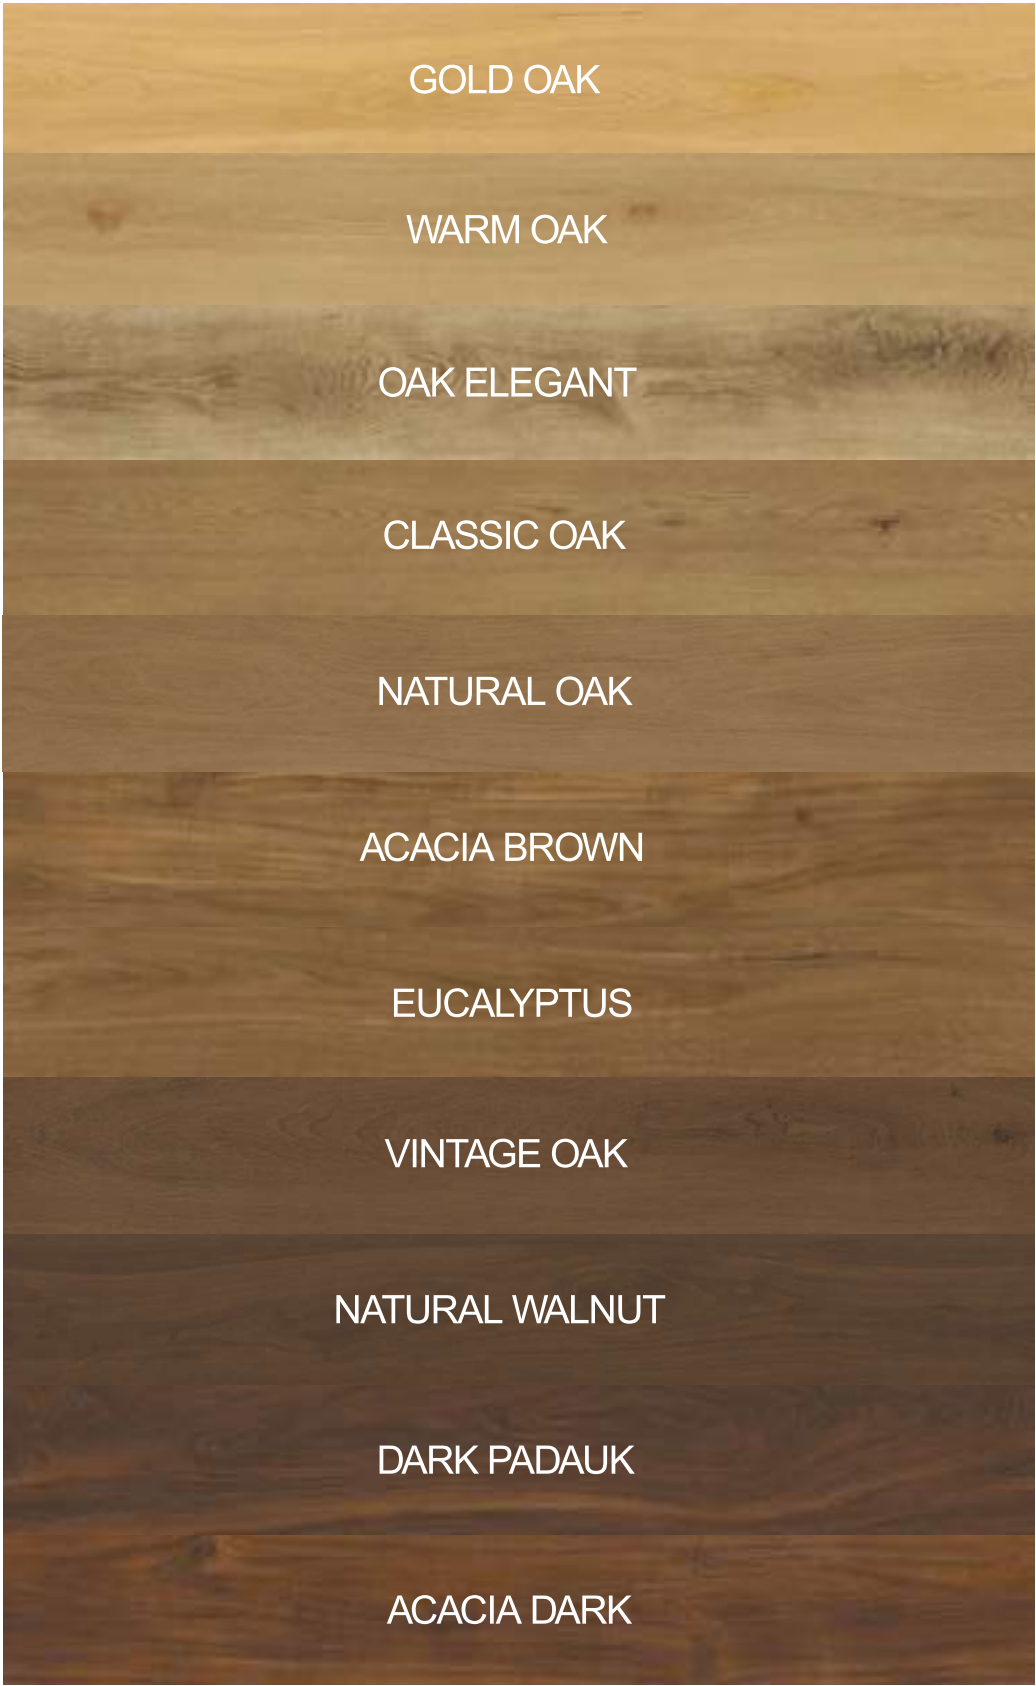



GOLD OAK

GOLD OAK




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

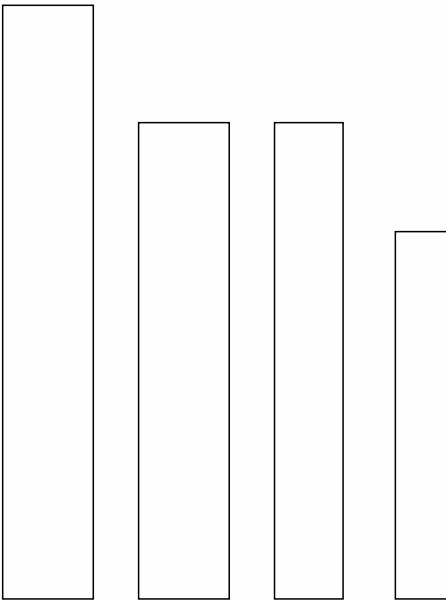

GOLD OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



WARM OAK




WARM OAK



PRO
DETAILING

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

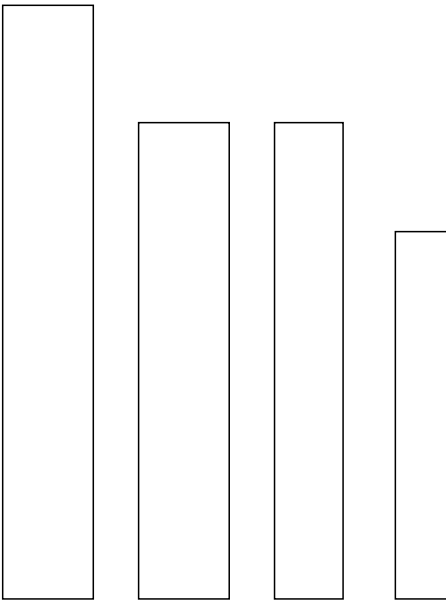

WARM OAK


TOTAL THICKNESS


5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING


STRAIGHT
RANDOM


HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



OAK ELEGANT




OAK ELEGANT



PRO
DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

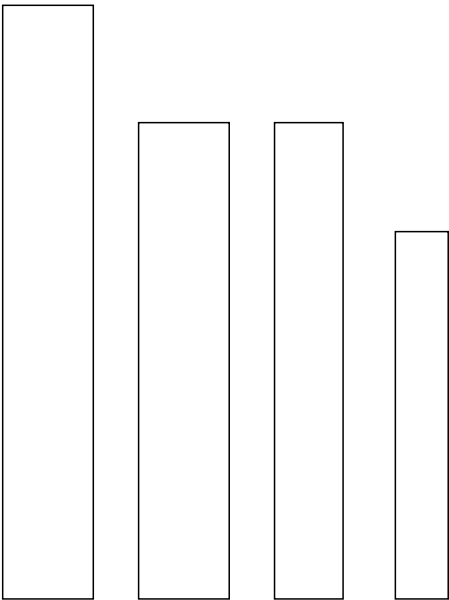

OAK ELEGANT

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



CLASSIC OAK




CLASSIC OAK



PRO
DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

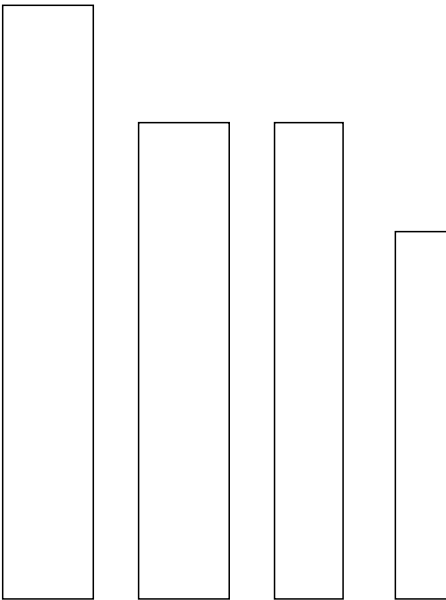

CLASSIC OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



NATURAL OAK




NATURAL OAK



PRO
DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

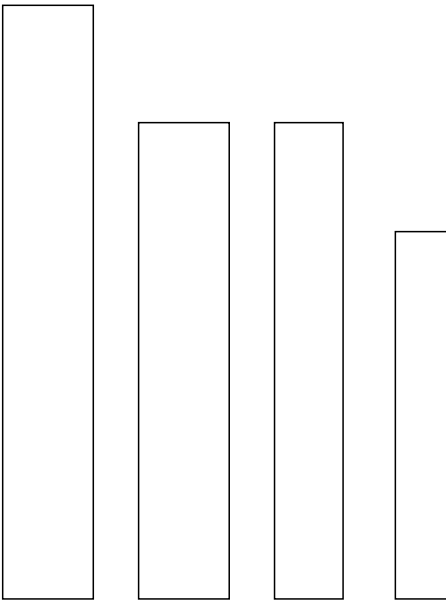

NATURAL OAK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



ACACIA BROWN



ACACIA BROWN



PRO
DETAILING

ACACIA BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM




HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM

230X1220 MM

230X1524 MM

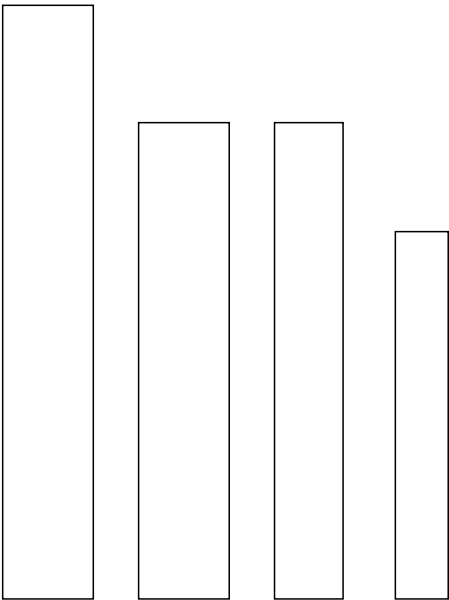

EUCALYPTUS






EUCALYPTUS

PRO
DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

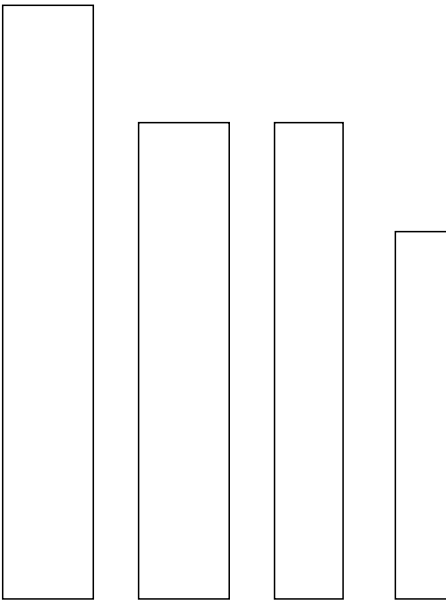

EUCALYPTUS


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



VINTAGE OAK




VINTAGE OAK



PRO
DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

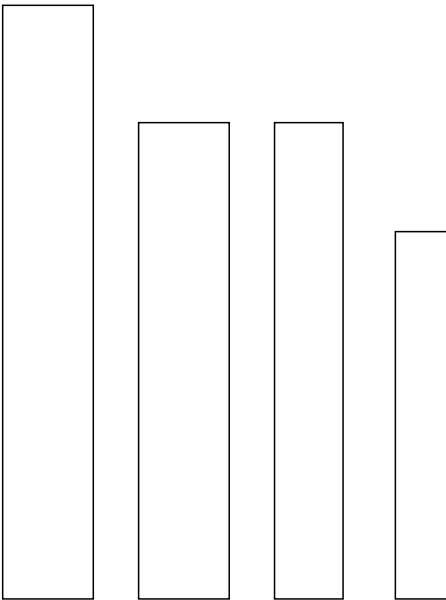

VINTAGE OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



NATURAL WALNUT



NATURAL WALNUT



PRO
DETAILING

NATURAL WALNUT

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

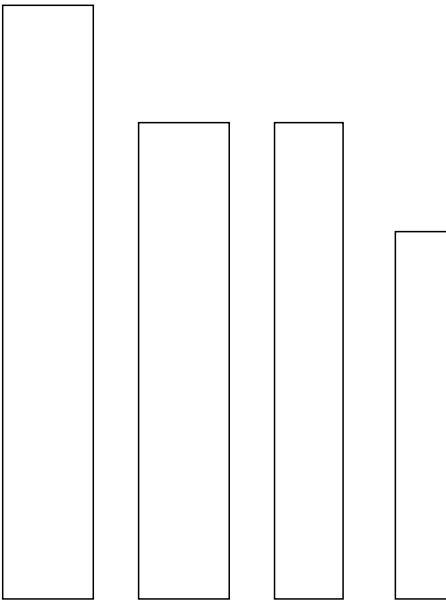

DARK PADAUK



DARK PADAUK



PRO
DETAILING

DARK PADAUK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

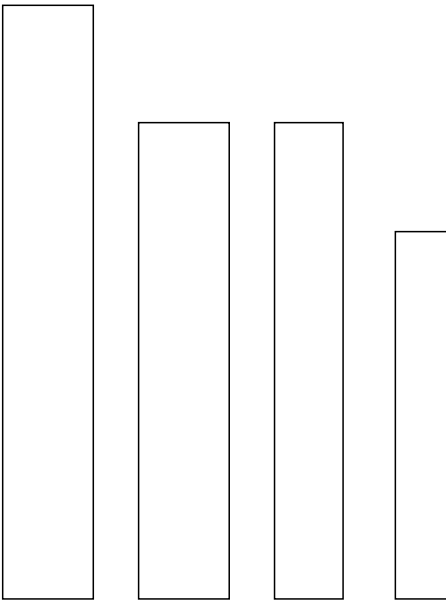

ACACIA DARK



ACACIA DARK



PRO
DETAILING

ACACIA DARK


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

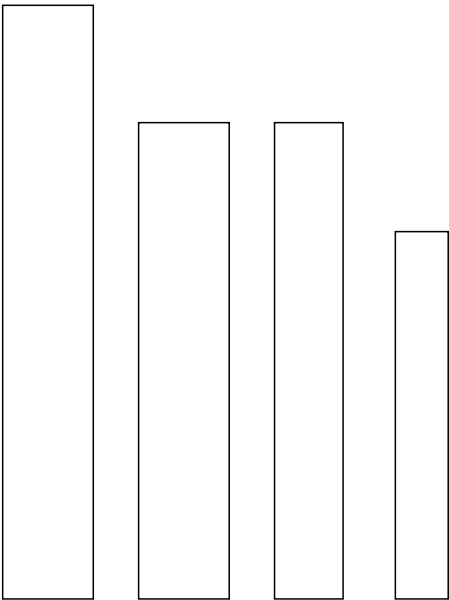

PRIME
COLLECTION



AVAILABLE
COLORS



GREY OAK	FANCY OAK
ASPEN WHITE	PARKHURST OAK
MAPLE BEIGE	MAPLE BROWN
COLUMBIA BEIGE	RUSTY BROWN
BEACHWOOD OAK	SESSILE OAK
PROTO OAK	EMORY OAK
ALPINE GREY	DALLAS BROWN
CHARNWOOD OAK	BOSTON GREY
SANDY OAK	ASH MIX
BOSTON NATURAL	CHICAGO GRIS
BLACKJACK OAK	PINE CHARCOAL



GREY OAK





GREY OAK

GREY OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

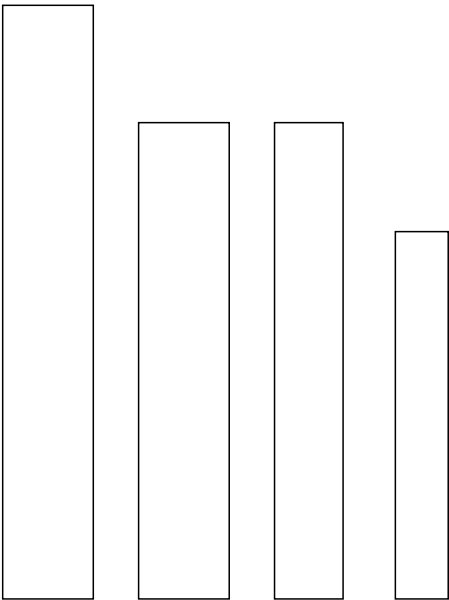

PRO
DETAILING

ASPEN WHITE



ASPEN WHITE



■

PRO
DETAILING

ASPEN WHITE

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

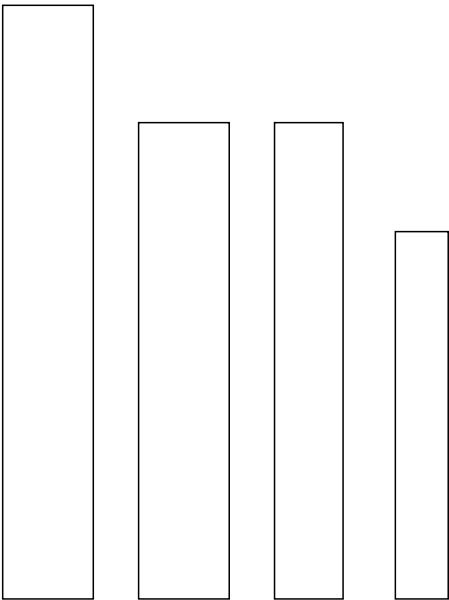

MAPLE BEIGE



MAPLE BEIGE




■

PRO
DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

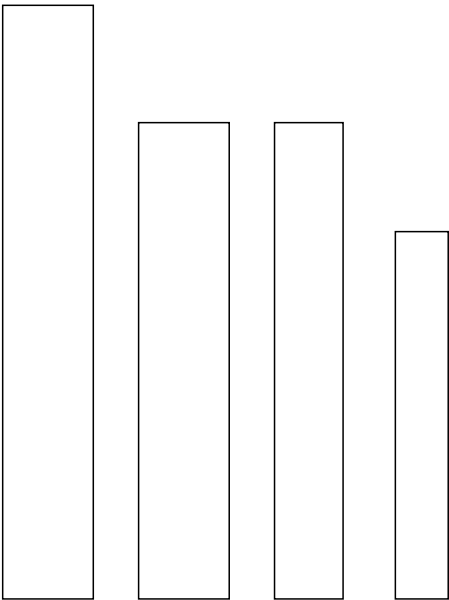

MAPLE BEIGE

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)





COLUMBIA BEIGIE



COLUMBIA BEIGIE


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

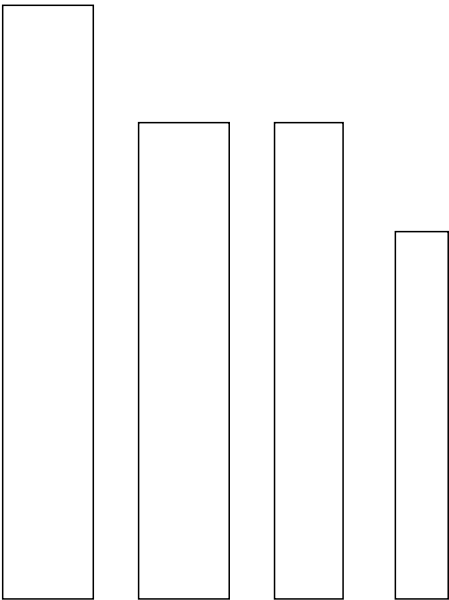

PRO
DETAILING



BEACHWOOD OAK



BEACHWOOD OAK



PRO

DETAILING

BEACHWOOD OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

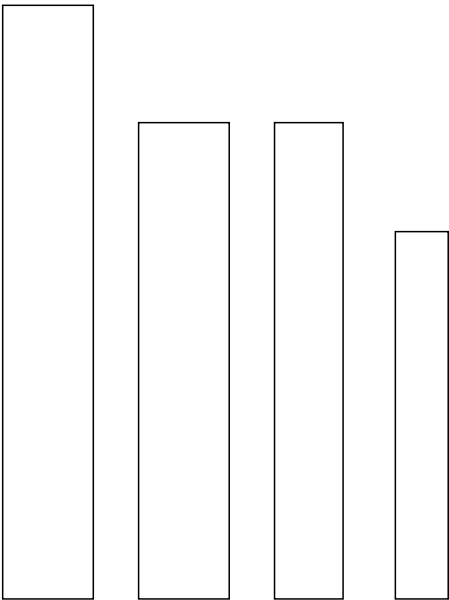

PROTO OAK



PROTO OAK




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

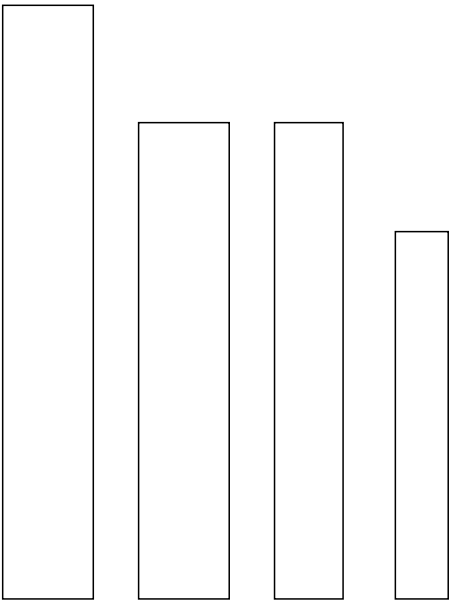

PROTO OAK

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)





ALPINE GREY

ALPINE GREY



ALPINE GREY


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

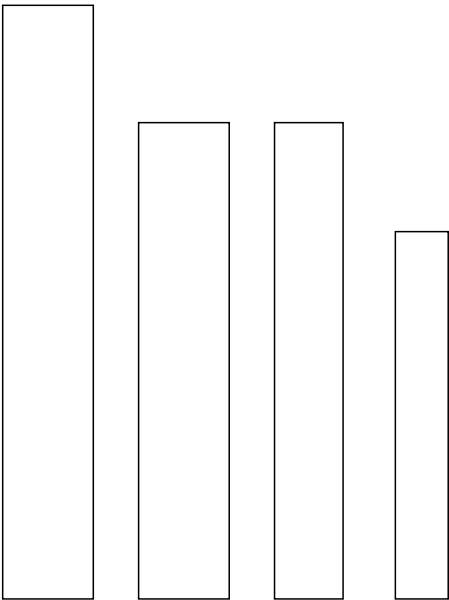

PRO
DETAILING



CHARNWOOD OAK



CHARNWOOD OAK




CHARNWOOD OAK

TOTAL THICKNESS
5 TO 7.5 MM

SURFACE
EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

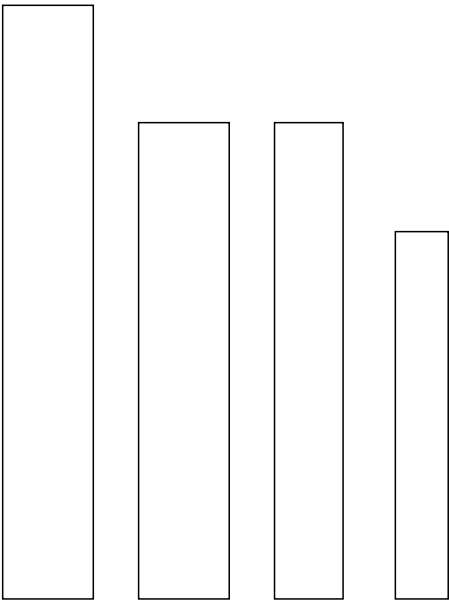

PRO
DETAILING

SANDY OAK



SANDY OAK



PRO

DETAILING

SANDY OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

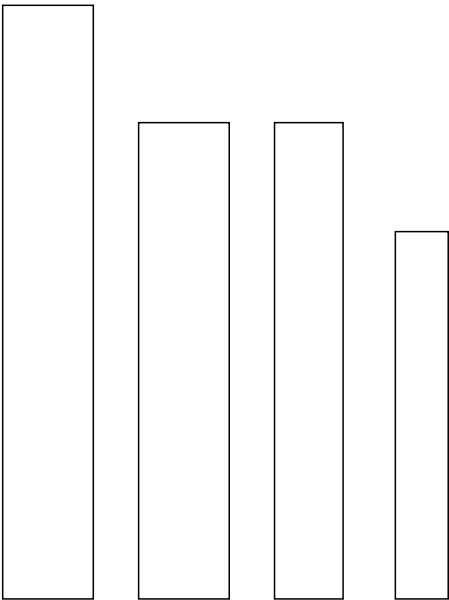

BOSTON NATURAL



BOSTON NATURAL




BOSTON NATURAL


TOTAL THICKNESS
5 TO 7.5 MM

SURFACE
EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

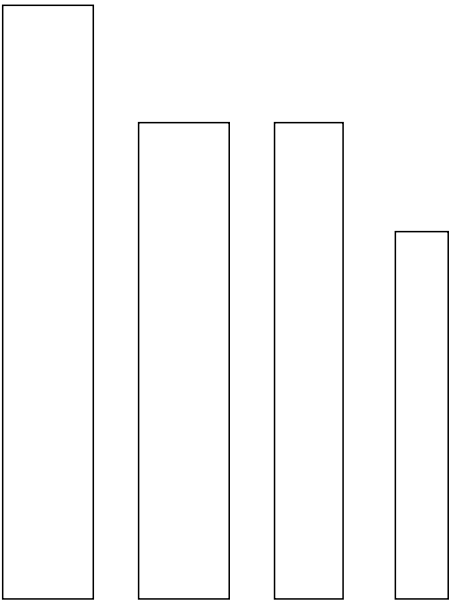

PRO
DETAILING

BLACKJACK OAK



BLACKJACK OAK




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

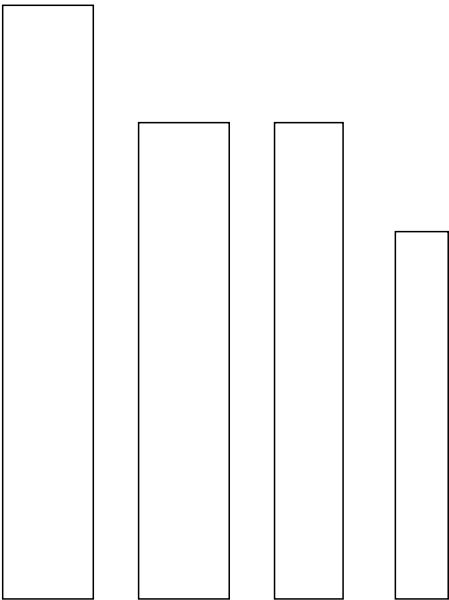

BLACKJACK OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



FANCY OAK



FANCY OAK




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

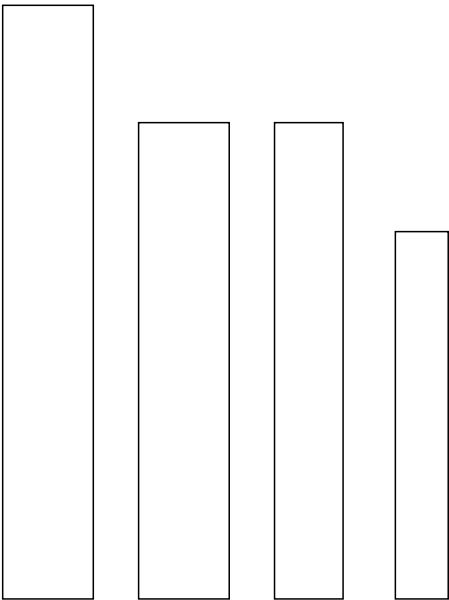

FANCY OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



PARKHURST OAK



PARKHURST OAK



PRO
DETAILING

PARKHURST OAK

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING


FITTING

STRAIGHT
RANDOM

HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

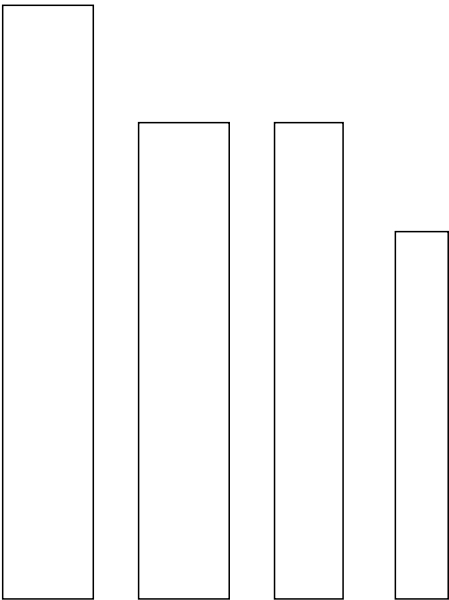

MAPLE BROWN



MAPLE BROWN



PRO

DETAILING

MAPLE BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

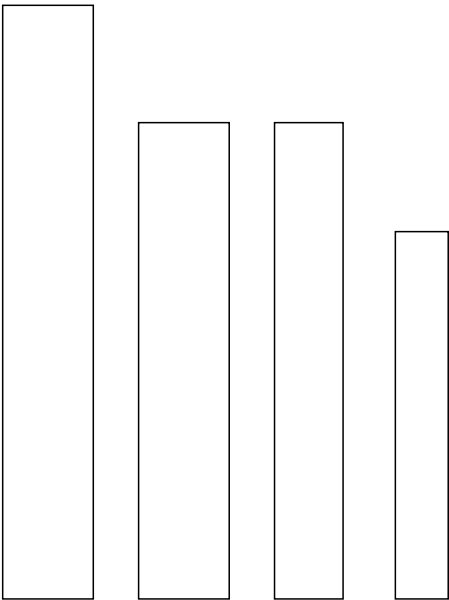

RUSTY BROWN



RUSTY BROWN



PRO

DETAILING

RUSTY BROWN


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

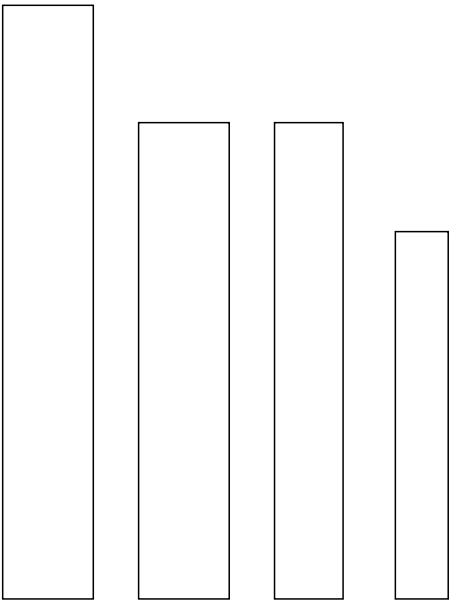

SESSILE OAK



SESSILE OAK




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

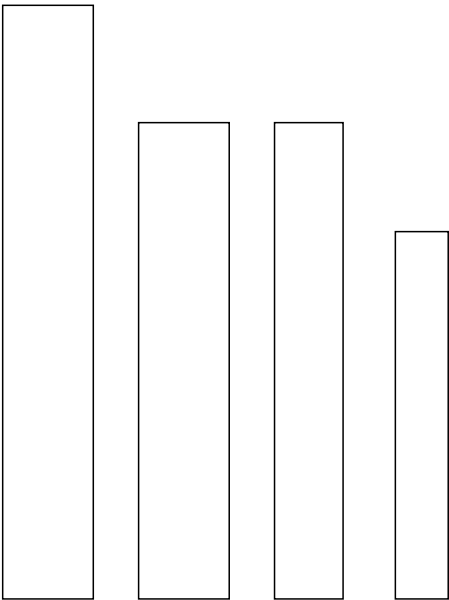

SESSILE OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



EMORY OAK



EMORY OAK




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

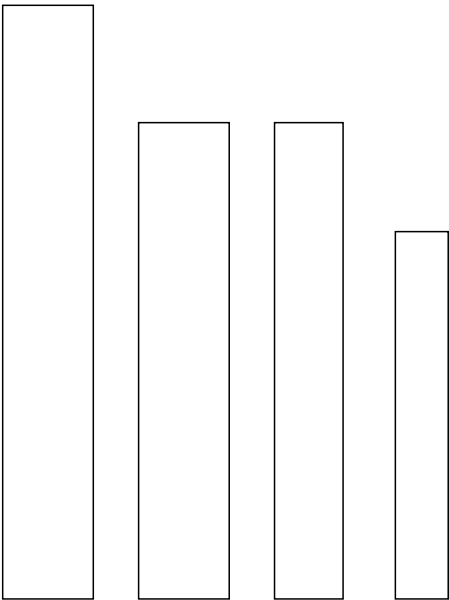

EMORY OAK


TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



DALLAS BROWN



DALLAS BROWN



PRO

DETAILING

DALLAS BROWN

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

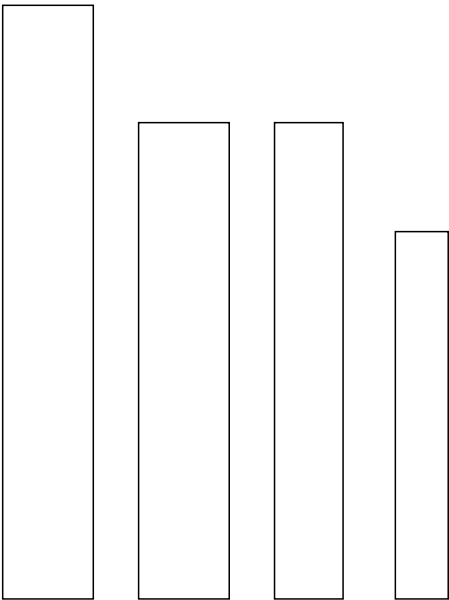

BOSTON GREY



BOSTON GREY



PRO

DETAILING

BOSTON GREY


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

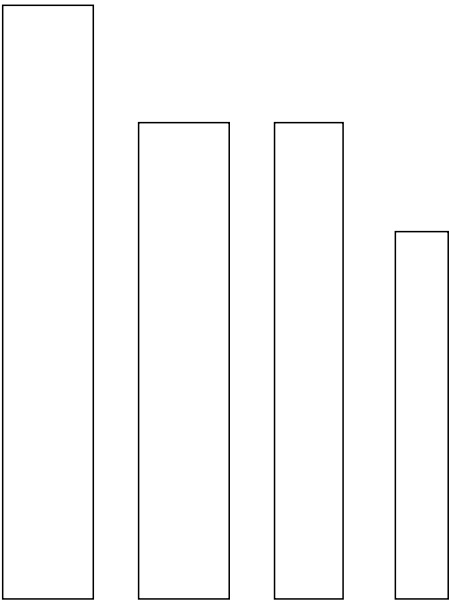

ASH MIX



ASH MIX



ASH MIX


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING




STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)

SIZES

- 155X914 MM
- 181X1220 MM
- 230X1220 MM
- 230X1524 MM

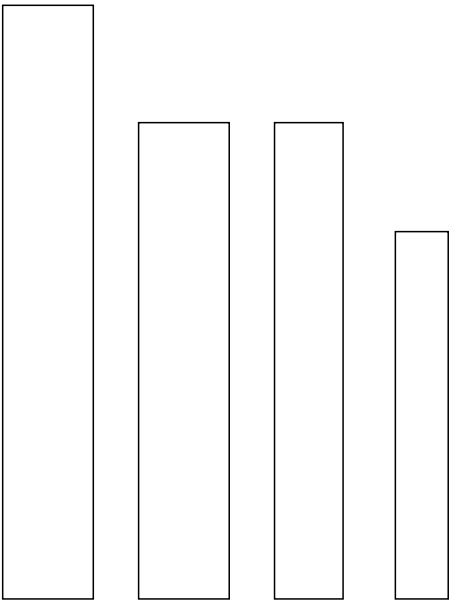

PRO
DETAILING



CHICAGO GRIS



CHICAGO GRIS




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

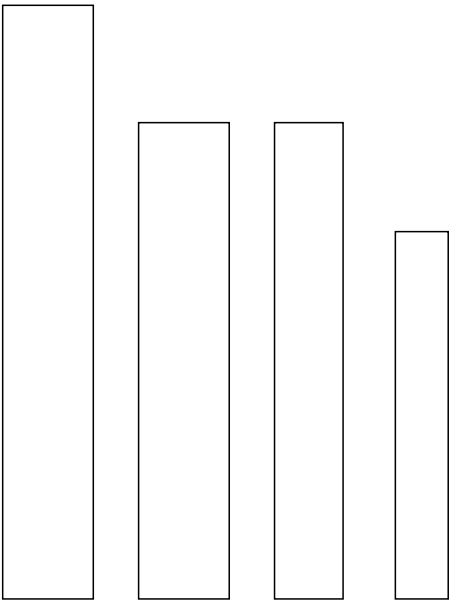

CHICAGO GRIS


TOTAL THICKNESS

5 TO 7.5 MM


SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



PINE CHARCOAL



PINE CHARCOAL




PRO

DETAILING

SIZES

- 155X914 MM
-
- 181X1220 MM
-
- 230X1220 MM
-
- 230X1524 MM

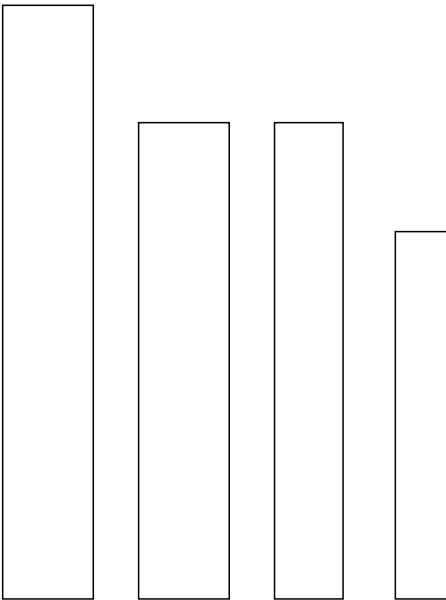

PINE CHARCOAL

TOTAL THICKNESS

5 TO 7.5 MM

SURFACE

EMBOSSED
WITH UV COATING

FITTING



STRAIGHT
RANDOM



HERRINGBONE
ONLY AVAILABLE IN
(155X914 MM)



TECHNICAL DATA

SYMBOL	PARAMETER	TEST STANDARD	SPECIFICATION / CRITERIA	RESULT
	Dimensional Stability	ISO 23999	< 0.10 mm	PASS
	Curling	ISO 23999	< 1 mm	PASS
	Micro scratch resistant	EN 16094	> 25000 Cycle(4N Load), <A2	PASS
	Residual Indentation	ACTME 1914	< 0.10 mm	PASS
	Shore D hardness	ASTM D 2240	> 15 to < 70 HD	PASS
	Scratch Resistance	—	> 6 N	PASS
	Abrasion Resistance	EN 13329	AC4 (> 4000 cycle)	PASS
	Pill strength	EN 24345	> 50 N / 50 mm	PASS
	Locking Strength	ISO 24334	> 250 N / 100 mm	PASS
	Density	ASTM D 792	1.95 TO 2.05 g/cm³	PASS
	Dimensional Variation After change in Relative humidity	EN 13329:2016	Long side <0.9mm Short side <0.9mm	PASS
	Large Ball Impact test	EN 438	1600 mm Height (320 gm load)	PASS



100%
waterproof



Patented interlock
system for
easy installation



Real to
touch texture



No Termites
No Bugs



Excellent
Acoustic



High
Dimensional
Stability



Scratch &
Stain
Resistant



Fire
Retardant




Easy
to Clean




INSTALATION


Installation is fast and easy thanks to the unique click lock system. Click Lock Technology works perfectly for both the long and short sides of the flooring panel and ensures there are no unwanted gaps or spaces between floorboards.




Start at a corner, tongue side facing wall, with spacers for an 8-12 mm expansion gap.




Assemble the second row on the subfloor, tilt and push to attach to the first row, then click into place.




Insert the second plank's end tongue into the first plank's end groove at an angle, then click into place.




Begin the next row with the last cut-off piece from the previous row




For the last plank of a row, measure, mark, score, and snap off the required length, then insert.




For heating vents, cut the plank to length, measure and mark areas to cut out, then cut allowing for expansion.



Begin the next row with the last cut-off piece from the previous row.



Trim door frames by placing a plank upside down next to the frame and cutting to the necessary height.



PACKING DETAILS

SPC Packing Details - 181x1220 MM

THICKNESS	BOX		PALLET			CONTAINER			
CORE+IXPE	PCS	SQM	BOX	SQM	WT-GROSS	PALLET	BOX	SQM	WT
4+1	10	2.21	75	166	1380	20	1500	3315	27600
5+1.5	08	1.77	75	133	1373	20	1500	2655	26850
6+1.5	07	1.55	75	116	1444	19	1425	2209	27431

****For Other Sizes And Thicknesses Please Contact Us.**

Discover the unmatched uniqueness and exclusivness with Ouras we don't compromise on quality either it comes to product or packaging. We have varieties of sizes as per our wide range of stunning designs and finishes to protect and maintain there Style.

SEAZONE GRANITO PVT. LTD.

OFFICE Address : A/1505, The Capital,
Opp. Hetarth Party Plot,
Science City Road, Sola, Ahmedabad-380060,
Gujarat(INDIA). Ph.: 079-40327077
info@savanaceramics.com
Customer Care No. +91 96876 37360

Factory Address :
A/1505 The Capital,
Plot No.-1207, Village-Gajera,
Taluka-Jambusar, Dist.-Bharuch(Guj-India)
Phone :02644-233274